

# Single Function Showerhead

**1.75 GPM WATERSENSE SHOWERHEAD**  
EV3010-CP175-XX



## FEATURES

- 1.75 gpm (6.6 L/min) maximum flow @ 80 psi
- 1.3 gpm (4.9 L/min) minimum flow @ 45 psi
- Single function, full-body spray
- 54 rub-clean, anti-clog spray nozzles
- Pressure compensating flow regulation
- 3 year warranty

## PHYSICAL CHARACTERISTICS

- ABS ½" NPT fittings (female)
- Plated ABS body
- Single function, full-body spray pattern
- 54 rub-clean, anti-clog spray nozzles
- Spray face diameter: 3.125" (7.9 cm)
- Length: 3.125" (7.9 cm)
- Weight: 4.25 oz (0.12 kg)

## PRODUCT SPECIFICATION

The Single Function Showerhead has ABS fittings and shall attach to shower arms with ½" NPT male fittings and flow at maximum rate of 1.75 gpm (6.6 L/min). The Single Function Showerhead has a 54 nozzle full body spray and is both WaterSense and cUPC certified.

## CODES / STANDARDS APPLICABLE


SPECIFIC MODEL MEETS OR EXCEEDS THE FOLLOWING:

- WaterSense & Uniform Plumbing Codes (cUPC): IAPMO IGC 244-2007a & ASME A112.18.1-2011/C-SA B125.1-11
- Conforms to A112.18.1M. For use with automatic compensating valves rated at 1.1 gpm (4.2 L/min) or less.



## PERFORMANCE VS. WATERSENSE STANDARD

WaterSense was created by the EPA to establish minimum performance requirements for efficient showerheads with the goal of improving user satisfaction. This showerhead exceeds the WaterSense standard and, as a result, users receive a great feeling, water and energy saving shower regardless of their home's water pressure.

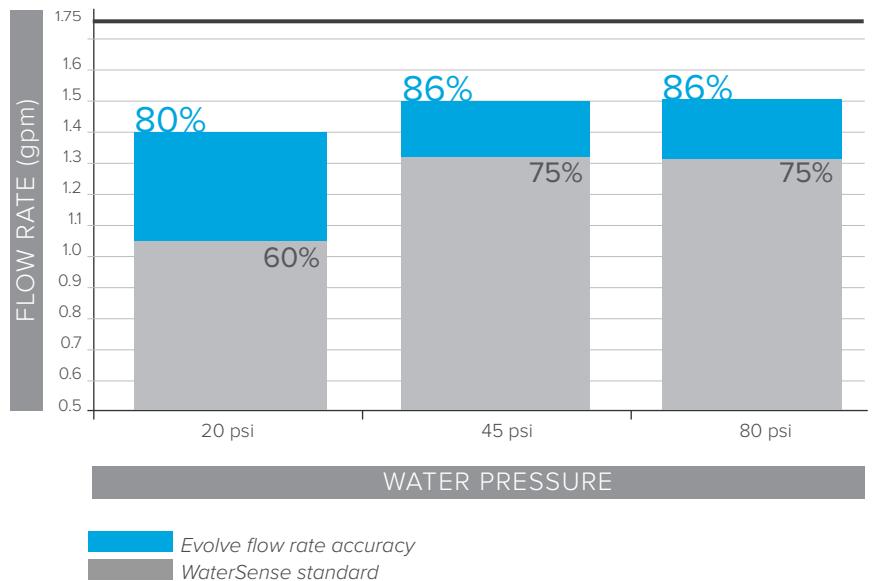

## SPECIFIED MODEL

MODEL	DESCRIPTION	FINISH
EV3010-CP175-SP	1.75 gpm (6.6 L/min) WaterSense Showerhead, full body spray; single shipper box	chrome polish
EV3010-CP175-BP	1.75 gpm (5.7 L/min) WaterSense Showerhead, full body spray; 48unit bulk pack	chrome polish