

LED 3-Way

5 / 9 / 17 Watt 2700K- RP
3-WAY OMNI LED



PRODUCT DESCRIPTION

5, 9, 17 watt 3-Way Omni-directional EarthBulb LED provides 450,800,1600 lumens respectively and replaces 40, 60, 100 watt incandescent directional bulbs for over 84% energy savings. 2700K color of light is standard. Great for use in table lamps, floor lamps, wall sconce, and task lighting applications. Multi-Chipset LED and an advanced cooling system provides for 25,000 hours of LED life. Medium screw base. Energy Star rated product.

PRODUCT FEATURES

- This A bulb is Energy Star and provides 450, 800 and 1600 lumens.
- Beam angle provides full radial illumination
- Chipset provides 2700K soft light with a high color rendering rating of over 80


PRODUCT APPLICATIONS



LUMINOUS DISTRIBUTION INTENSITY DATA


Y(deg) C(deg)	0	23	45	68	90
0	82.9	82.8	82.7	82.6	82.5
5	82.9	82.7	82.6	82.4	82.3
10	82.8	82.7	82.6	82.5	82.5
15	82.9	82.8	82.8	82.8	82.8
20	83.1	83.0	82.9	82.9	83.0
25	83.3	83.2	83.1	83.1	83.2
30	83.7	83.5	83.4	83.4	83.5
35	84.1	83.8	83.6	83.6	83.7
40	84.3	84.0	83.7	83.7	83.8
45	84.4	84.0	83.7	83.7	83.8
50	84.4	83.9	83.5	83.4	83.6
55	84.1	83.6	83.1	83.0	83.2
60	83.6	83.0	82.5	82.3	82.5
65	82.9	82.2	81.6	81.4	81.7
70	82.0	81.3	80.6	80.3	80.6
75	80.9	80.0	79.3	79.0	79.3
80	79.5	78.6	77.8	77.5	77.7
85	77.8	76.9	76.1	75.7	76.0
90	75.9	75.0	74.1	73.7	74.0

LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

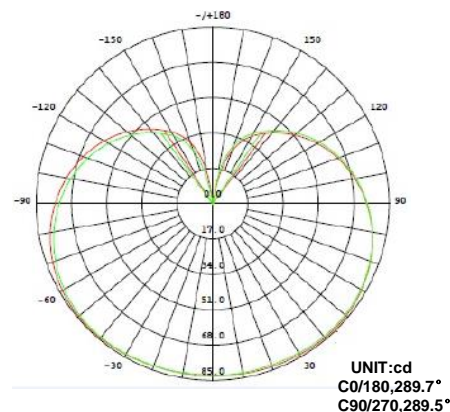

AVERAGE BEAM ANGLE (50%):289.6°

Note: IES files available upon request.

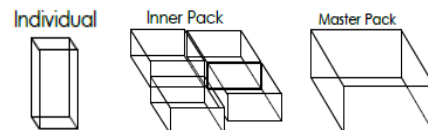

MODEL NUMBER: L3WA211727

Order Code	Pack Size	Individual UPC	Inner Pack UPC	Qty	Master Park UPC	Qty
10049	1	840791100493	00840791100493	6	84079110049300	24
Dimensions (inches - Length x Width x Height)						
10049	1	2.93 x 2.93 x 6.55	9.48 x 6.96 x 7.16	6	19.3 x 13.54 x 7.71	24
Weight (lbs)						
10049	1	.50	2.87	6	11.99	24

Electrical	
Watt	5 / 9 / 17
Input Current	104 (mA)
Power Factor	> 0.90
Voltage	120 volt
Frequency	60hz
Min. Start Temp	-4F
Max. Operating Temp	104F
Base Type	E26 Medium
Light	
Initial Lumens	1600
Lumens per Watt	94
Color Temperature	2700K
Color Rendering (CRI)	83
Beam Angle	Omni Directional
Agency Approvals	
UL	Yes
Energy Star	25,000 rated hours
RoHS	Yes
FCC	Yes
Product Details	
Warranty	10 years, 6 hrs/day
Mercury Content	0
Diameter	2.93"
Overall Length	6.55"

