



The Mobile Home Revolution Continues!

Revolv® RG7 95%+ AFUE Gas Furnaces

WITH COIL CABINET



WITHOUT COIL CABINET



High Efficiency: 95%+ AFUE.

Sealed Combustion: Can be vented vertically or horizontally with PVC pipe.

Sealed Combustion-Vents Exhaust Gases: Directly outdoors and draws in outside fresh air for combustion.

Choice of Models: For A/C and H/P applications through 4 tons.*

Modern Hot Surface Ignition: No pilot light to blow out.

Multi-Speed Direct Drive Blower.

Low Maintenance: Sealed bearings on motors, reliable controls and burners.

Appliance Quality Metal Door: With baked enamel finish for long life and easy cleaning.

*Use additional coil cabinet above 3.0 ton AC or HP



Warranty

2 Years Parts / 1 Year Labor

10 Years Heat Exchanger

Visit www.stylecrestinc.com
for warranty registration



Revolv® RG7 95%+ Gas Furnaces

Model Number	Description	Shipping Weight Lbs.
RG7D45N4	Gas-95%+, Downflow, 45KBTU, no cabinet, 4 Ton blower	150
RG7D60N4	Gas-95%+, Downflow, 60KBTU, no cabinet, 4 Ton blower	150
RG7D72N4	Gas-95%+, Downflow, 72KBTU, no cabinet, 4 Ton blower	155
RG7D45C4	Gas-95%+, Downflow, 45KBTU, w/cabinet, 4 Ton blower	170
RG7D60C4	Gas-95%+, Downflow, 60KBTU, w/cabinet, 4 Ton blower	170
RG7D72C4	Gas-95%+, Downflow, 72KBTU, w/cabinet, 4 Ton blower	175

RG7 95%+ Gas Furnace Specifications

Furnace Model Number	Input KBTU/H	Output KBTU/H	A/C Ready Tons
RG7D45N4	45	42.75	4
RG7D60N4	60	57	4
RG7D72N4	72	68.4	4
RG7D45C4	45	42.75	4
RG7D60C4	60	57	4
RG7D72C4	72	68.4	4

VENTING

All models are approved for both vertical and horizontal direct (2 pipe) venting applications. See Vent Table below for specified sizes and allowable lengths.


Maximum Direct Vent, Dual Pipe Length (ft.)*

RG7 Inputs (BTUH)	Inlet/Outlet 3 in. Diameter	Inlet/Outlet 2 in. Diameter
45,000	60	30
60,000	60	30
72,000	60	30

*NOTES:

1. Subtract 3.5 ft. for each additional 3" 90 degree elbow.
2. Two 45 degree elbows are equivalent to one 90 degree elbow.
3. One short radius elbow is equivalent to two long radius elbows.
4. Do not include termination elbows in calculation of vent length.
5. This table is applicable for elevations from sea level to 2,000 ft.
For higher elevations decrease vent pipe lengths by 8% per 1000 ft. of altitude.
6. Only the listed pipe materials are approved for use with RG7 condensing furnaces.
7. For Canadian applications, use ULC S636 approved material.

DIMENSIONS

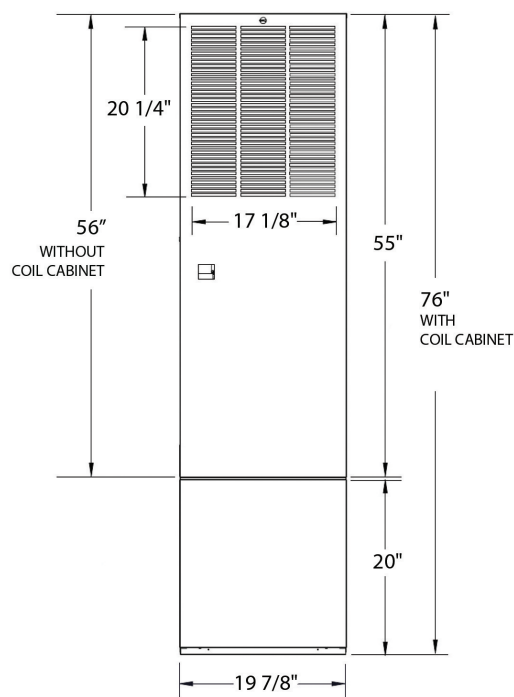

Accessories

Duct Connectors	Part Number
11.25 x 13.50 x 0.88 12/carton	901987A
11.25 x 13.50 x 2.00 12/carton	901988A
11.25 x 13.50 x 4.25 6/carton	901989A
11.25 x 13.50 x 6.25 6/carton	901990A
11.25 x 13.50 x 8.25 4/carton	901991A
11.25 x 13.50 x 10.25 3/carton	901992A
11.25 x 13.50 x 12.25 3/carton	901993A
11.25 x 13.50 x 6.25 24/carton	902681A

Clearances

All Models	Closet	Alcove
Front	1"	1"
Back	0"	0"
Sides	0"	0"
Vent	0"	0"
Top	6"	6"
Duct (Plenum) (w/coil box)	0"	0"
Duct (Plenum) (w/o coil box) within 3 feet	1/4"	1/4"