



Inswing Combination

Series 5210

Standard Features

- Galvanized steel frame which is precambered on the lock side to promote a tight seal
- Three heavy duty hinges join the core to the frame
- Heavy, damage resistant panels are securely bonded to the core
- Effective insulated foam core
- Thermally broken threshold
- Core is edge bored and capped for easy addition of dead bolt
- Residential style butt hinges used to mount inswinging core
- Lockside metal blind stop and integral sealing system
- Prefinished jamb system
- Double leaf sill sweep
- Stainless steel lock system with adjustable strike plate
- Self-storing heavy duty aluminum framed storm door with stainless steel bushings in the hinges
- Manufactured to comply with
 - HUD Std. 3280-405
 - AAMA 1702.2.95
- Optional painted frame





An efficient thermal entrance system for manufactured housing. Completely prehung and ready to install, the 5210 includes a tough fiberglass-clad inner door and an energy efficient storm door.



Available Window Styles


Contact your sales representative for the full line of available window and door styles.

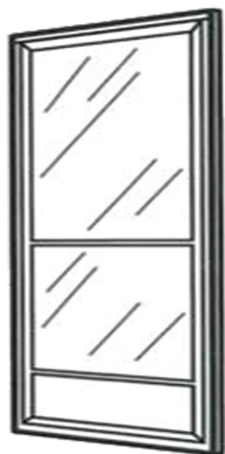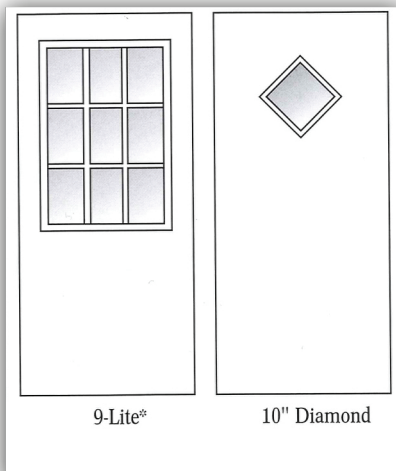

Storm Door Style:
Self Storing Storm Door

Kinro 5210 Series Cambered Door

1. Door is precambered at manufacture for consistency.
2. Door does not require adjustment of camber at installation, saving time and money.
3. Door will "spring" to fit flat or convex walls.
4. Door is weather tight.

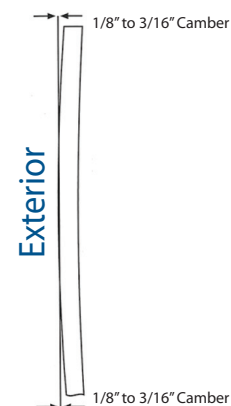

Standard Sizes

Call sizes are the same as rough opening sizes.
Rough opening must be exact (+ or -) 1/8"

- 32 x 76
- 34 x 76
- 34 x 78
- 34 x 80
- 36 x 78
- 36 x 80
- 38 x 80

It is the responsibility of the owner, architect, or builder to make product selections that are in compliance with applicable laws and building codes.

2012 Kinro Inc. all rights reserved. Due to continuous product improvement, Kinro reserves the right to make changes including, and not limited to, design, accessories, colors and pricing without notice or obligation. Some details shown separately, or on products illustrated in this literature, may be optional at extra cost. Your Kinro sales representative is always the best source of current information.