

Outswing Door

Series 5140

Standard Features

- Strong welded aluminum frame with integral weather baffle
- Three heavy duty hinges join the core to the frame
- Heavy, damage resistant panels are securely bonded to the core
- Effective insulated foam core
- · High density foam lock block
- Core is edge bored and capped for easy addition of dead bolt
- Bulb vinyl on all four sides form the primary sealing system - Extruded flap vinyl on all four sides of the frame form the secondary seal
- Manufactured to comply with
 - HUD Std. 3280-405
 - AAMA 1702.2.95
- Painted frame option available.




An outswing entrance door that combines beauty, durability, and efficiency. It is completely prehung and ready to install. The 5140 also has a flat mounting flange.




Available Window Styles

Contact your sales representative for the full line of available window and door styles.

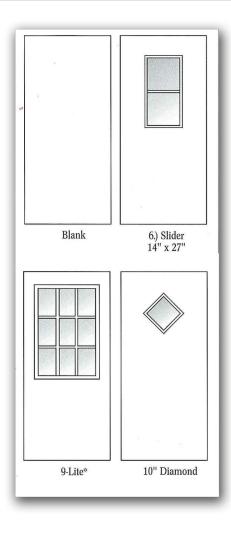

Kinro 5140 Series **Cambered Door**

- 1. Door is precambered at manufacture for consistency.
- 2. Door does not require adjustment of camber at installation, saving time and money.
- 3. Door will "spring" to fit flat or convex walls.
- 4. Door is weather tight.



Standard Sizes

Call sizes are the same as rough opening sizes. Rough opening must be exact (+ or -) 1/8"

- 30 x 76
- 34 x 76
- 32 x 78

- 32 x 72
- 30 x 78
- 34 x 80

- 32 x 76
- 32 x 74
- 36 x 80

It is the responsibility of the owner, architect, or builder to make product selections that are in compliance with applicable laws and building codes.

2012 Kinro Inc. all rights reserved. Due to continuous product improvement, Kinro reserves the right to make changes including, and not limited to, design, accessories, colors and pricing without notice or obligation. Some details shown separately, or on products illustrated in this literature, may be optional at extra cost. Your Kinro sales representative is always the best source of current information.